


# Laun

MASCHINEN- UND APPARATEBAU GMBH

WALDSTRASSE 71  
 D-65451 KELSTERBACH  
 GERMANY  
 TELEFON: +49-6107-98669-0  
 TELEFAX: +49-6107-98669-20  
 INTERNET: [www.laun-online.com](http://www.laun-online.com)  
 EMAIL: [info@laun-online.com](mailto:info@laun-online.com)

## ROTARY VALVE TYPE B

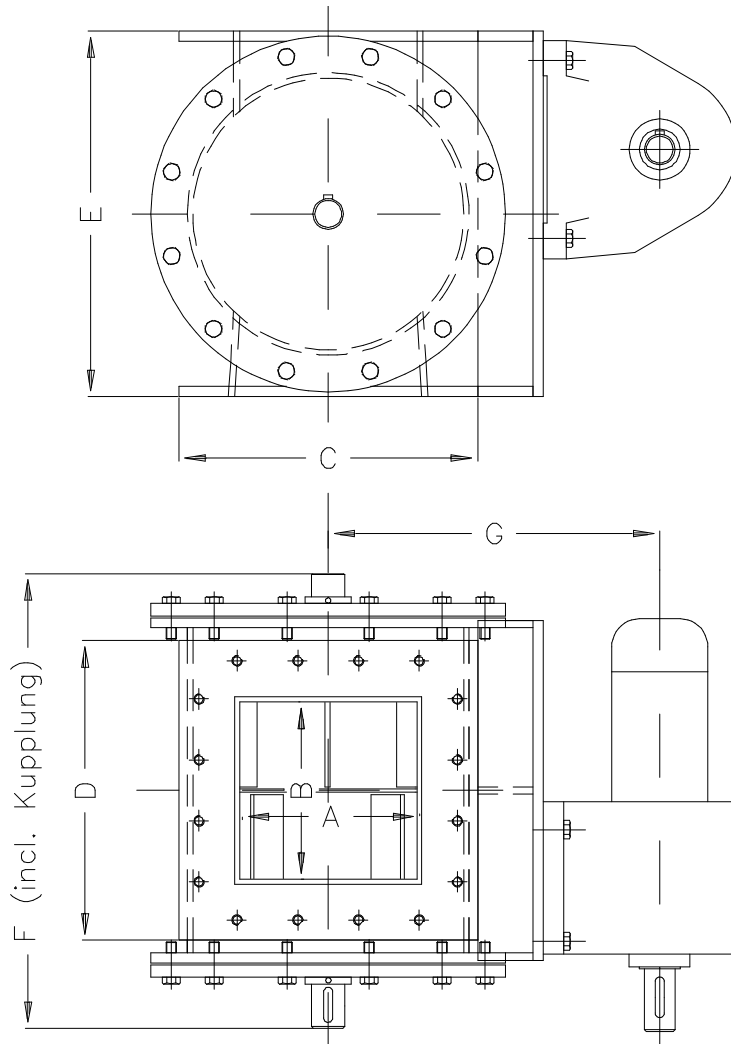

Discharge capacities at 100 % charge  
 in the range of 4,3 to 23,8 min<sup>-1</sup>

Size	150/300 :	1,7	to	17,3 m <sup>3</sup> /h
	200/330 :	2,4	to	25,4 m <sup>3</sup> /h
	250/380 :	4,1	to	43,3 m <sup>3</sup> /h
	300/460 :	7,8	to	82,6 m <sup>3</sup> /h
	350/530 :	12,9	to	138,3 m <sup>3</sup> /h
	400/600 :	21,3	to	228,6 m <sup>3</sup> /h

Size	A	B		C	D		E
		min.	max.		min.	max.	
150/300	150	150	300	320	320	470	480
200/330	200	200	400	380	380	580	500
250/380	250	250	500	450	450	700	580
300/460	300	300	600	540	540	840	640
350/530	350	350	700	590	590	940	720
400/600	400	400	800	640	640	1040	800

Size	F (ca.)		G (ca.)
	min.	max.	
150/300	665	815	620
200/330	715	915	650
250/380	765	1015	685
300/460	875	1175	790
350/530	925	1275	815
400/600	975	1375	840

(subject to change without notice, chain protection hood not shown)

# Laun

MASCHINEN- UND APPARATEBAU GMBH


WALDSTRASSE 71  
D-65451 KELSTERBACH  
GERMANY  
TELEFON: +49-6107-98669-0  
TELEFAX: +49-6107-98669-20  
INTERNET: [www.laun-online.com](http://www.laun-online.com)  
EMAIL: [info@laun-online.com](mailto:info@laun-online.com)

## ROTARY VALVE TYPE R

Discharge capacities at 100 % charge  
in the range of 4,5 to 22,0 min<sup>-1</sup>

Size	100/150 :	0,4	to	1,6 m <sup>3</sup> /h
	150/200 :	1,1	to	4,7 m <sup>3</sup> /h
	200/250 :	2,3	to	9,5 m <sup>3</sup> /h
	250/300 :	4,8	to	21,0 m <sup>3</sup> /h
	300/350 :	8,0	to	35,0 m <sup>3</sup> /h
	350/400 :	10,7	to	46,0 m <sup>3</sup> /h
	400/500 :	19,4	to	83,7 m <sup>3</sup> /h

Connecting flanges optional PN6 or PN10 acc. to DIN2501.  
Materials acc. to customer requirements.

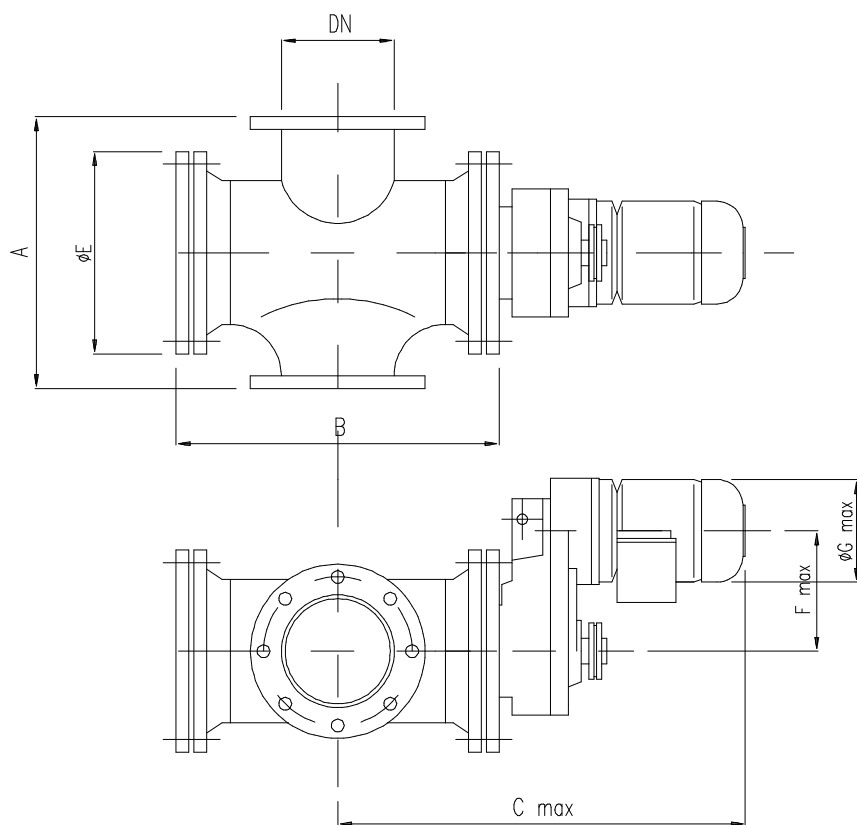


SIZE	A	B	C	DN	E	F	G
100/150	330	380	615	100	285	248	176
150/200	440	515	680	150	340	248	176
200/250	560	615	730	200	395	248	176
250/300	630	704	890	250	445	328	194
300/350	710	808	947	300	505	328	194
350/400	800	888	987	350	565	328	194
400/500	900	1012	1049	400	670	328	194

# Laun

MASCHINEN- UND APPARATEBAU GMBH

WALDSTRASSE 71  
D-65451 KELSTERBACH  
GERMANY  
TELEFON: +49-6107-98669-0  
TELEFAX: +49-6107-98669-20  
INTERNET: [www.laun-online.com](http://www.laun-online.com)  
EMAIL: [info@laun-online.com](mailto:info@laun-online.com)

## ROTARY VALVE K50/100

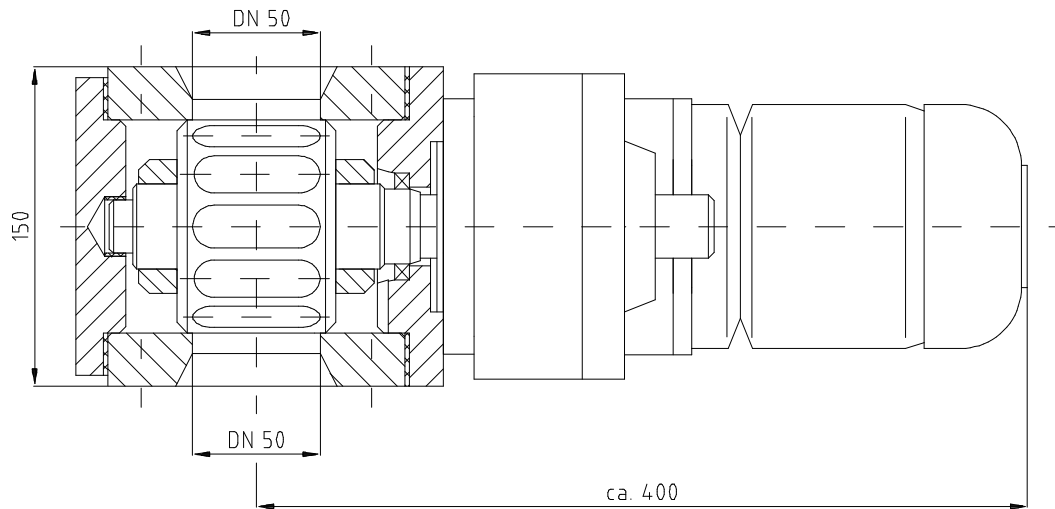

**Discharge capacities at 100 % charge from 0 l/h to 300 l/h.**

- Connecting dimensions preferably acc. to DIN 2501 (PN 6 or PN 10) or acc. to customer specification.
- Cell-star as well as inlet and outlet can be adapted to customer requirements.
- Resistant to pressure shock up to 10 bar.
- Due to small tolerances only little leakage. Additional leakage minimization possible:.
- High-temperature version up to 650 °C (depends on materials)
- Materials can be adapted to customer requirements.